


THINKWARE DASH CAM™ F70



Key Features



ON SEMI Image Sensor

2.1M CMOS Image Sensor enhanced with low light and high dynamic range scene performance for both day and night images.



Front Vehicle Departure Warning

Alerts when the vehicle in front moves from its stationary position.



Multiple Recording Modes

Automatic switching between multiple recording mode(Continuous, Incident, Parking) provides optimal surveillance.



Safety Camera Alert

(Optional GPS Required)

- Red Light Camera
- Speed Camera
- Mobile Speed Camera Zone
- Average Speed




Thermal Self-Protection

The thermal sensor triggers the self-protection mechanism to shut down the device under extreme temperatures.



Parking Surveillance

With hardwiring installation, it employs a combination of motion and impact detection to protect the vehicle from hit-and-runs.



Impact Monitoring

The Active Impact Monitoring System utilizes a 3-axis G-Sensor to secure incident footage.



PC viewer / Mac Viewer

View and download the recorded video from the PC/Mac viewer. The speed and location data can be displayed if the dash cam was connected with GPS antenna.

Specification Detail



Technical Specification

Resolution:
1080P Full HD (1920 X 1080)

Camera (Image Sensor):
ON SEMI CMOS 2.12M

Frame rate:
30 fps

Viewing Angle:
140° (Diagonal)

Dimensions:
78 X 34.6 X 31.5 mm (3.1 X 1.4 X 1.2 inch)

Weight:
54.0g (0.12lbs)

GPS:
External GPS Antenna (Optional)

Storage Temperature:
-20° to 70°C

Operating Temperature:
-10°C to 60°C

Capacity:
Micro SD Card
8GB/16GB/32GB/64GB(UHS-I)


Interface:
GPS Receiver port, DC-IN,
V-IN, MicroSD Card slot.

Input Power:
DC 12/24V, Built-in Super Capacitor


Recording Time

Video Quality		Full HD 30fps
Capacity	8GB	62 min
	16GB	124 min
	32GB	248 min
	64GB	496 min

What's In the Box

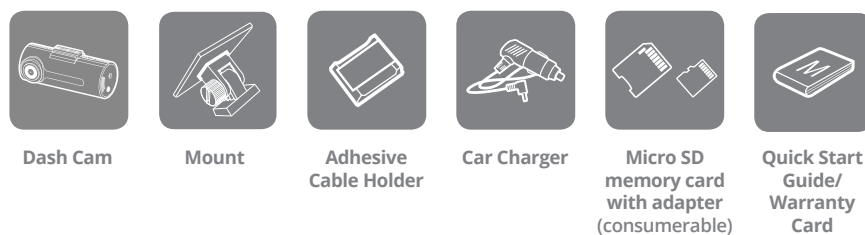

Optional Accessories

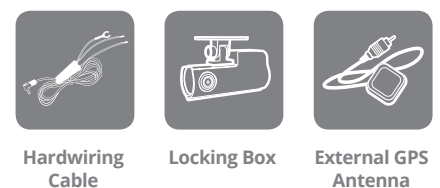

THINKWARE DASH CAM™