

FLAX EVO

PS 130 FE

Technical Sheet


5" Woofer



SPECIFICATIONS

| | | |
|--------------------|----------------|---------|
| Nominal power | 60W | |
| Maximum power | 120W | |
| Sensitivity | 90.5dB | |
| Nom. impedance | 4Ω | |
| Cone | Flax | |
| Surround | TMD - Rubber | |
| DC resistance | 3.3Ω | |
| VC diameter | 25mm | 1" |
| Former | Kapton | |
| Layers | 2 | |
| Wire | Copper | |
| Net weight | 850g | 1.87lbs |
| Frequency response | 75-28kHz | |
| Crossover | 12dB/Oct @3kHz | |

FREQUENCY RESPONSE/IMPEDANCE

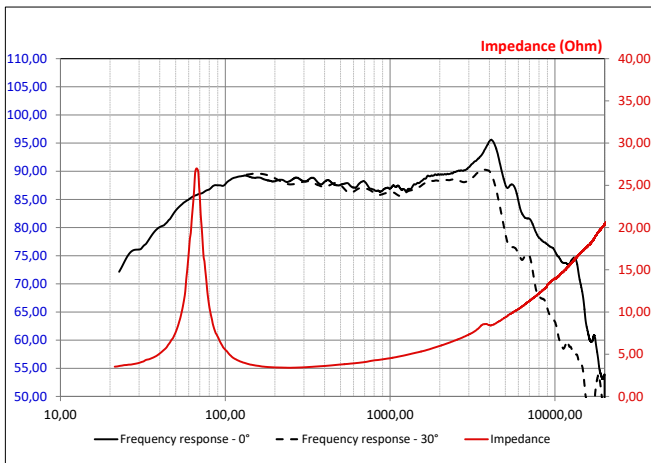

PARAMETERS

| | |
|------|-------------------|
| Rdc | 3.3Ω |
| Fs | 67Hz |
| Mms | 10.3g |
| Cms | 0.53mm/N |
| Vas | 12l |
| Qts | 0.6 |
| Qes | 0.63 |
| Qms | 11 |
| Bxl | 4.8N/A |
| Sd | 83cm ² |
| SPL | 90.5dB |
| Xmax | 4mm |

MECHANICAL DRAWING

