

Hertz HMR BT Waterproof Bluetooth Receiver




Specification

FRONT PANEL IP RATING	Ip67
LINE OUTS	1x Stereo RCAs (left and right)
FREQUENCY RESPONSE	20 Hz - 18 kHz (±1dB)
S/N Ratio @ 4Vrms (THD <1%)	93 dB (20 Hz - 20 kHz)
PREOUT VOLTAGE & IMPEDANCE	4V RMS / <100Ohm
REMOTE OUT	8V - 24V
OPERATING VOLTAGE	8V - 28V
Fuse	2A
OPERATING TEMPERATURE RANGE	-10°C - 50°C

Sources

BLUETOOTH®	5
	Audio streaming
	Max distance 10 m / 30 ft.
A2DP / AVRCP	Playback
Qualcomm® APTX low latency	CD quality streaming
REMOTE CONTROL	HMC U1

Physical Specs

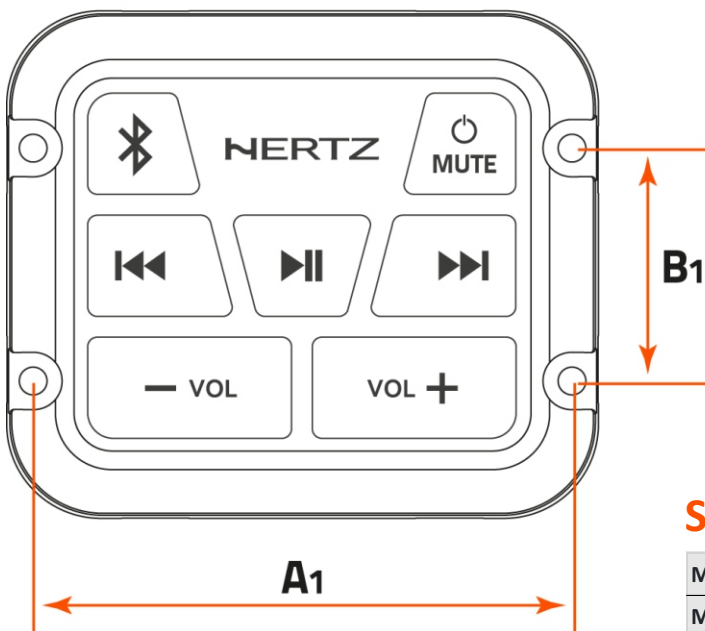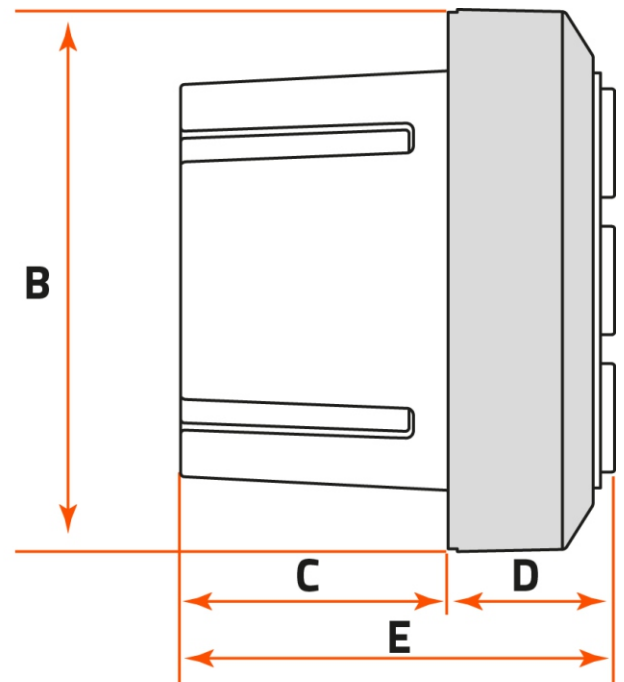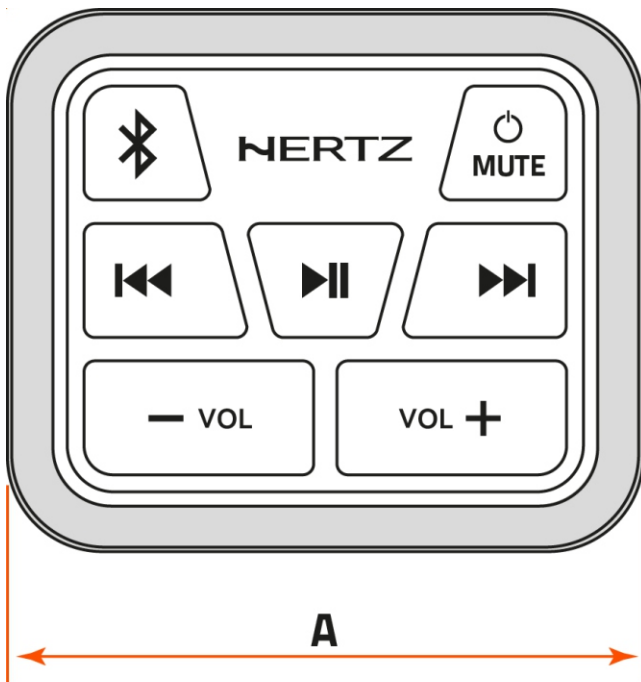

A	73,2 - 2.9 (mm - in.)
A1	64,1 - 2.5 (mm - in.)
B	63,7 - 2.5 (mm - in.)
B1	27,7 - 1.09 (mm - in.)
C	39,1 - 1.54 (mm - in.)
D	16,7 - 0.66 (mm - in.)
E	55,8 - 2.2 (mm - in.)

Size & Mounting

Mounting Hole diameter mm (in.)	∅ 45 (1.77)
Mounting Method	Panel mount (4 screws); U-Bracket